

MaxLink PR22


Parabolic antenna

Gain	22dBi
B to F ratio	>30db
Directivity	10°
SWR	<1,5
Diameter	320mm
Weight	1,2kg
Frequency	5,3- 5,8GHz
Polarization	horizontal/vertival
Impedance	50Ω
Connector	N female
Pole diameter	28-66mm
Optional kit	Radom




Diagrams

Directionality

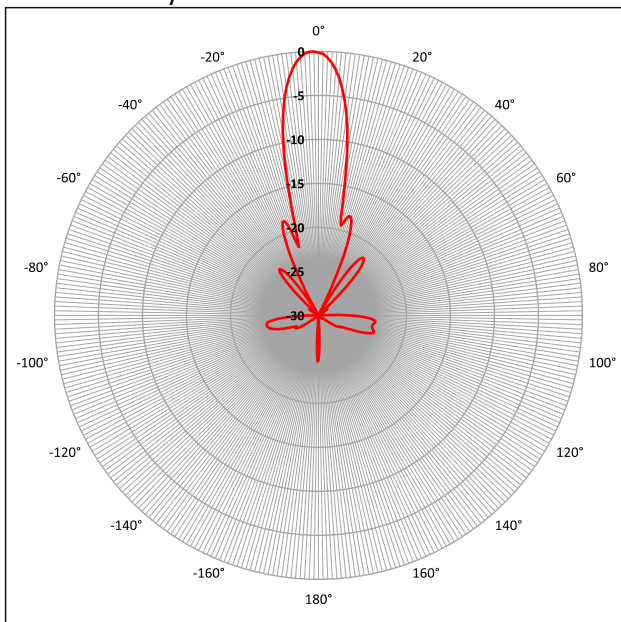

SWR

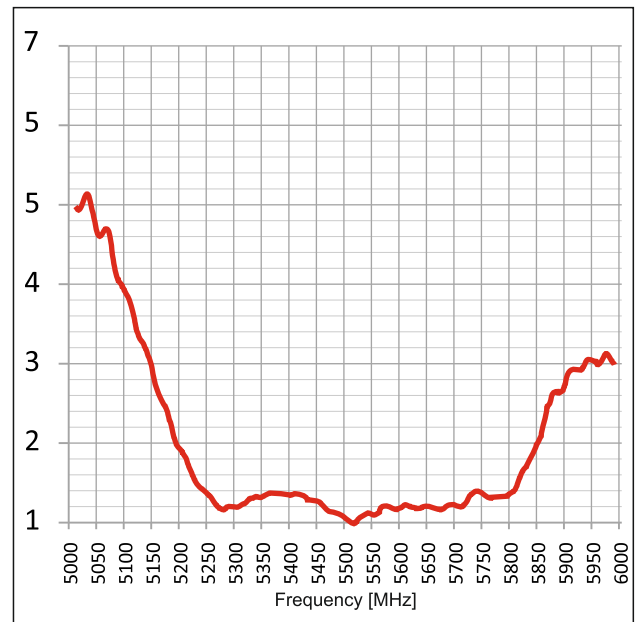

MaxLink PR24


Parabolic antenna

Gain	24dBi
B to F ratio	>30db
Directivity	8°
SWR	<1,5
Diameter	420mm
Weight	1,35kg
Frequency	5,3- 5,8GHz
Polarization	horizontal/vertival
Impedance	50Ω
Connector	N female
Pole diameter	28-66mm
Optional kit	Radom




Diagrams

Directionality

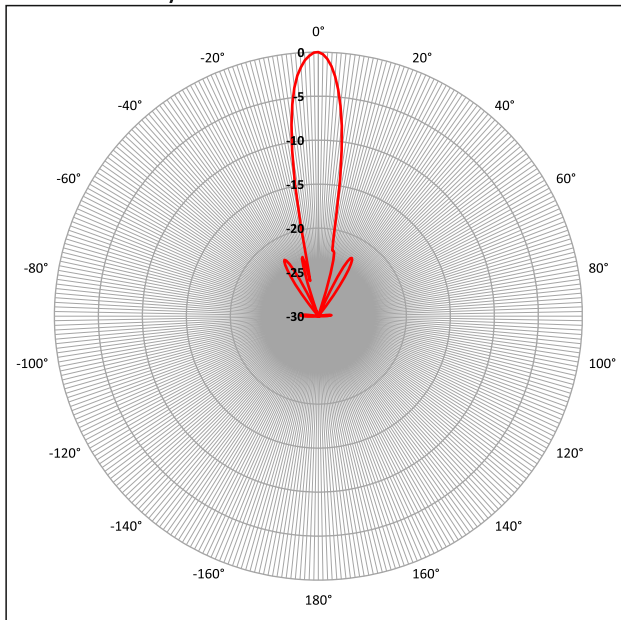

SWR

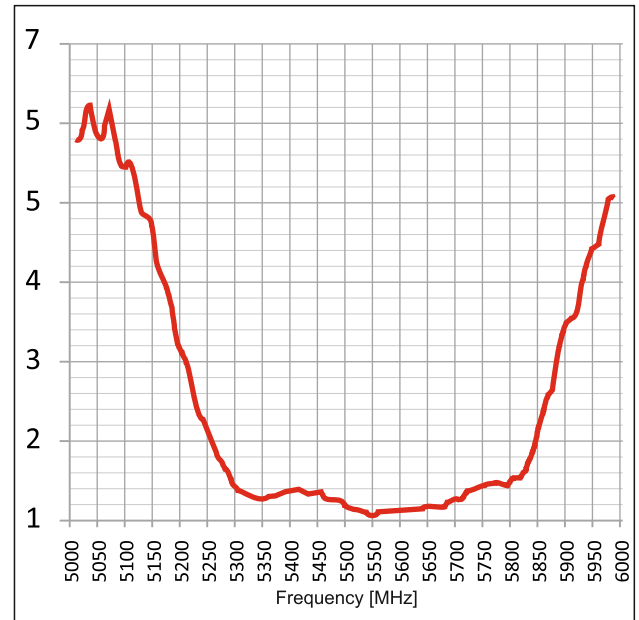

MaxLink PR24E


Parabolic antenna

Gain	24dBi
B to F ratio	>30db
Directivity	6°
SWR	<1,5
Diameter	420mm
Weight	1,35kg
Frequency	5,3- 5,8GHz
Polarization	horizontal/vertical
Impedance	50Ω
Connector	N female
Pole diameter	28-66mm
Optional kit	Radom




Diagrams

Directionality

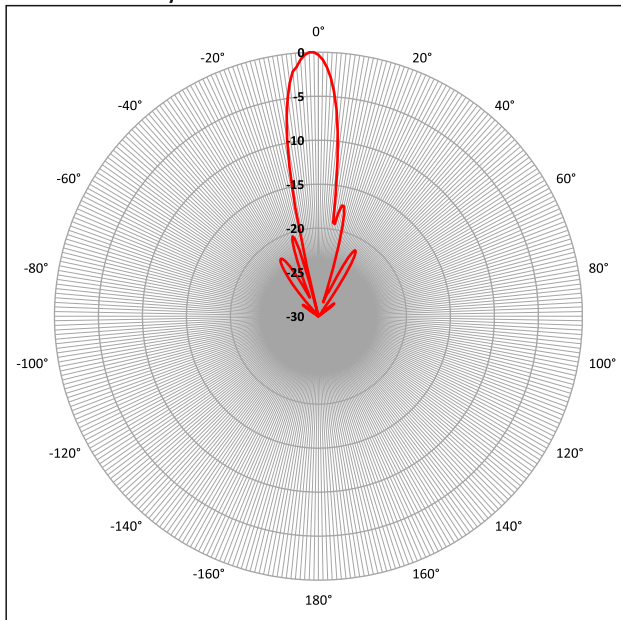

SWR

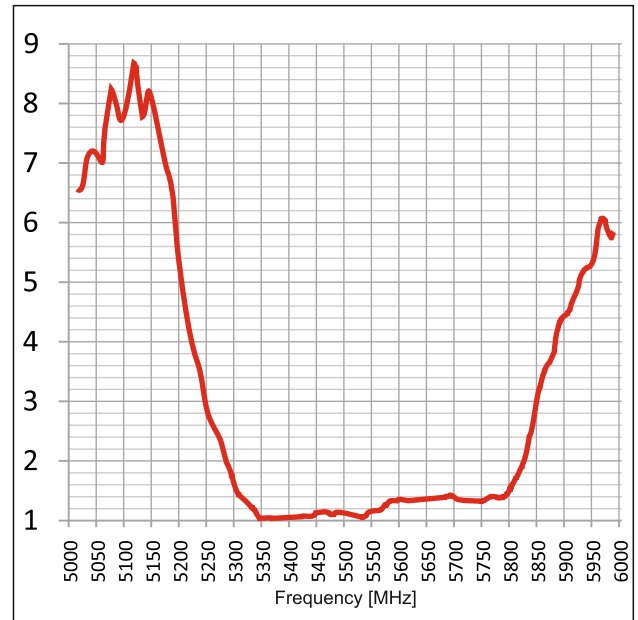

MaxLink PR29


Parabolic antenna

Gain	29dBi
B to F ratio	>30db
Directivity	6°
SWR	<1,5
Diameter	570mm
Weight	1,5kg
Frequency	5,3- 5,8GHz
Polarization	horizontal/vertical
Impedance	50Ω
Connector	N female
Pole diameter	28-66mm
Optional kit	none




Diagrams

Directionality

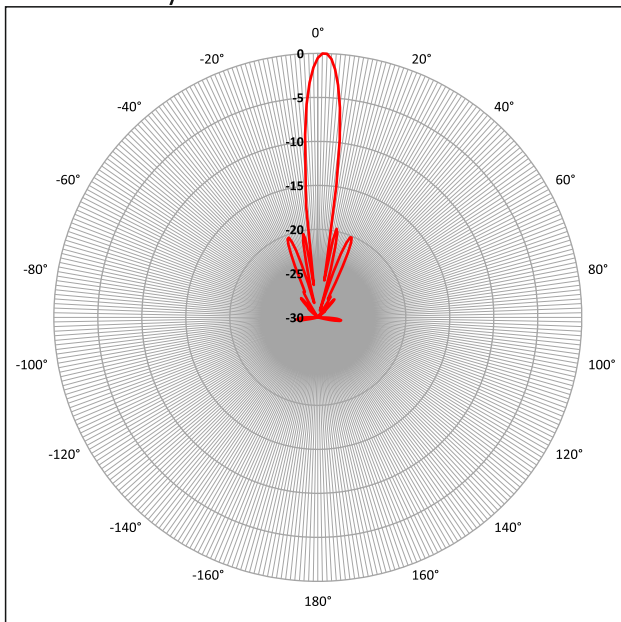

SWR

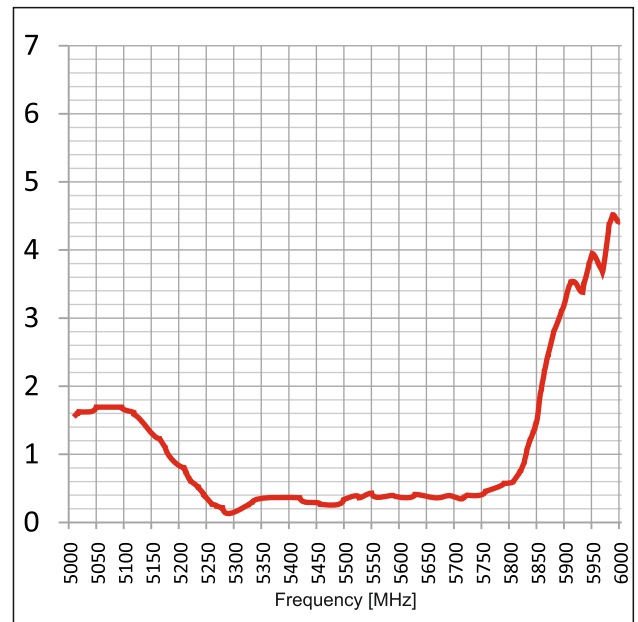

MaxLink PR29E


Parabolic antenna

Gain	29dBi
B to F ratio	>30db
Directivity	6°
SWR	<1,5
Diameter	595mm
Weight	1,95kg
Frequency	5,3- 5,8GHz
Polarization	horizontal/vertival
Impedance	50Ω
Connector	N female
Pole diameter	28-66mm
Optional kit	Radom included



Diagrams

Directionality

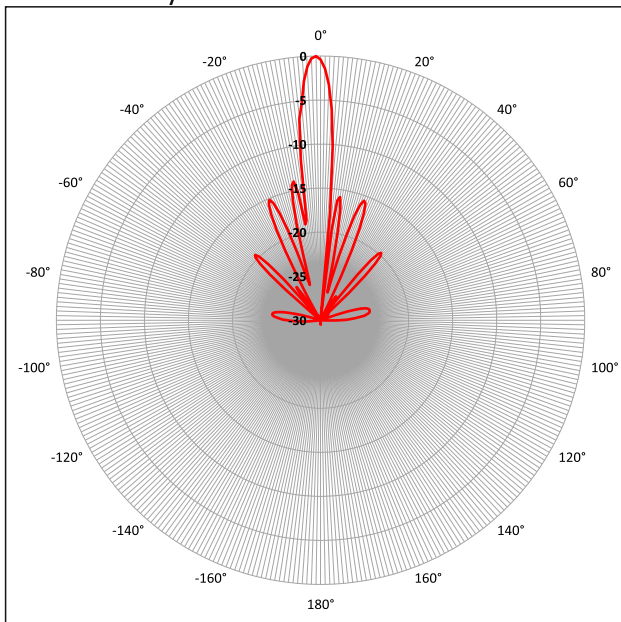

SWR

