



Wireless NVR with HDMI & VGA Outputs

The X5S wireless NVR features advanced video compression technology and supports up to 4 or 8 units of 5-Megapixel Wi-Fi cameras.

Key Features




HDMI/VGA Output



H.265

Wi-Fi Range up to 300 ft. (100 m)







Supports 5-Megapixel Cameras



Third Party Compatibility



Up to 8TB Storage



H.264 (Mainstream video compression)

Records More Images with Less Storage

The X5S provides faster video streaming and stores more footage than ever thanks to H.265 video compression technology.




Required bandwidth: 100%

Required storage space: 100%

Captures Details Beautifully

Save your high-quality recordings with X5S. It supports 5-Megapixel resolution when viewing live and playing back video, so nothing escapes the eye.



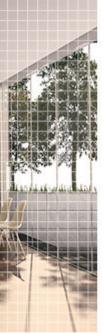

H.265 (Upgraded video compression)




Required bandwidth: 50%

Required storage space: 50%

Achieve Full Coverage

Enjoy entire coverage with no blind spots. The X5S connects up to 4 or 8 Wi-Fi cameras, allowing you to monitor every corner simultaneously on multi-split screens.

Hereby declare: Wi-Fi Performance is affected by several factors. The functional performance of the described product may attenuate when there is INTERFERENCE caused by wireless routers, mobile cellular 4G base stations, radar, microwave ovens, and substation. Wireless performance will be negatively affected when there are physical obstacles, or the IP Camera is placed too far from the NVR to be linked.

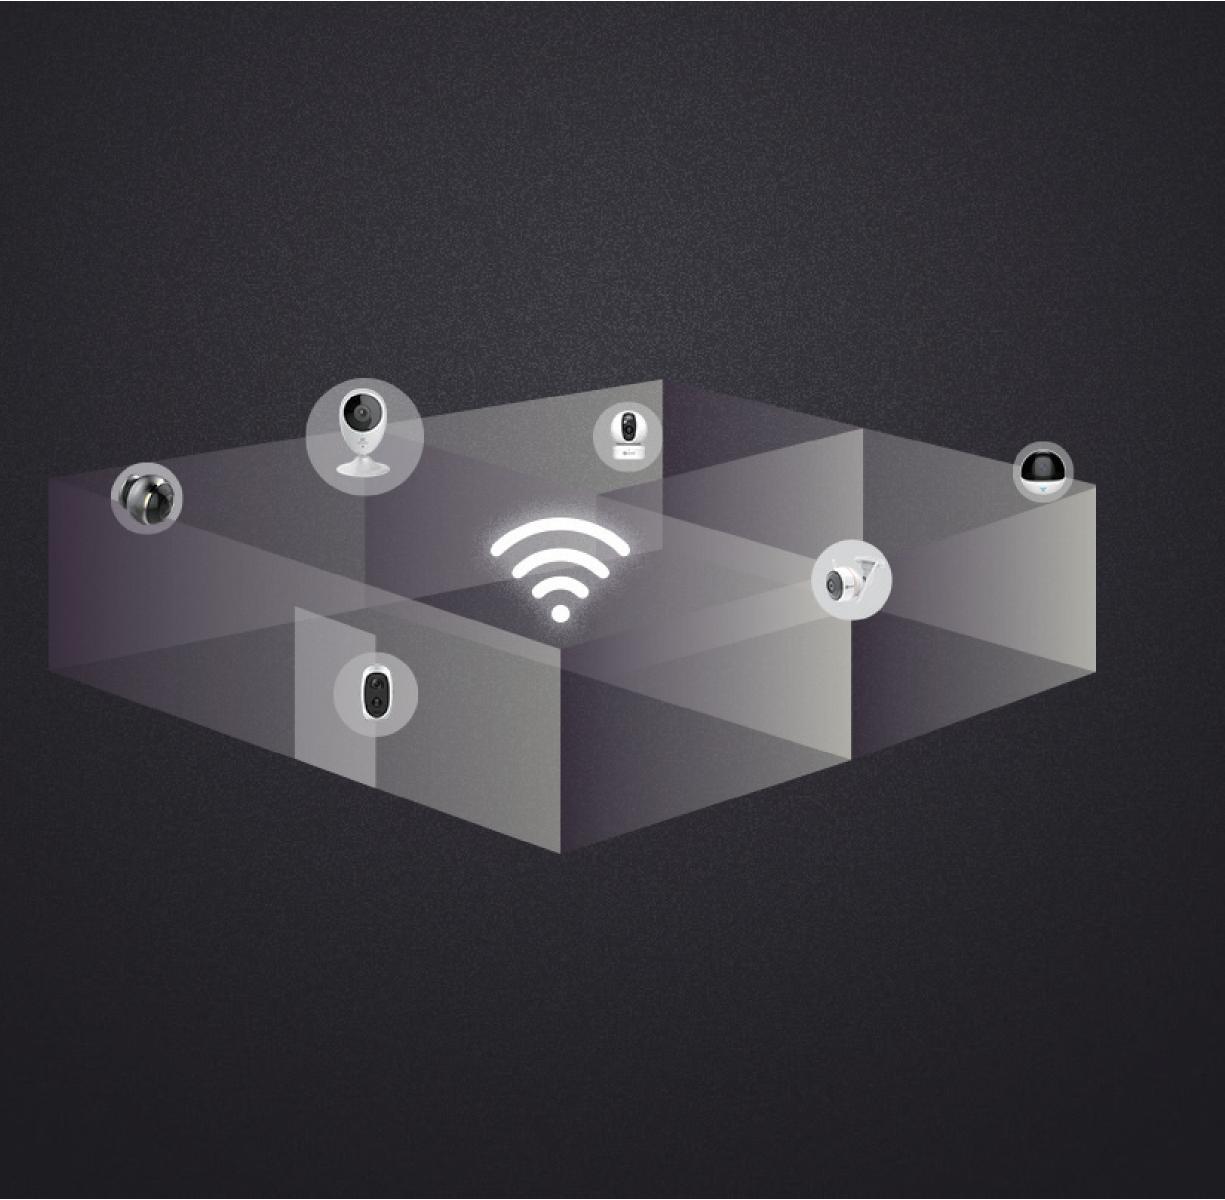

IPC Access Capability		Video Recording Management	
Wireless IPC Access Capability Wired IPC Access Capability	5MP *4 (X5S-4W) / 5MP *8 (X5S-8W) 5MP *4 (X5S-4W) / 5MP *8 (X5S-8W)	Video Recording Mode	Manual video recording ; Motion detection recording ; Scheduled video recording ; Event triggered recording
		Backup Mode	Hard disk backup, Internet applicaton backup
Network Parameter		Playback Mode	Instant playback ; Normal playback ; Event playback ; Tag playback; Log event playback
Number of Antenna	2		
Maximum Wireless Range	100m	AI Capability	
Radio Frequency	2.4G	Facial Recognition	Supports, with cameras supporting facial detection
Ethernet Port	One 10/100M adaptable Ethernet interface		Supports, with sufficient supporting fusion detection
Required Access Bandwidth	50mbps /100mbps	Open Protocol	
Video Output		Open Protocol Support	Yes
VGA	1 channel (identical to HDMI output) resolution up to: 1920*1080/60Hz	HDD	
HDMI	1 Channel	Interface Type	One built-in SATA port
	resolution up to: 2560*1440/30HZ	Capability	Supports 1TB to 8TB 3.5inch HDD
Audio/Video Codec		External Interface	
Recording Resolution	5MP/4MP/3MP/1080p/UXGA/720p/VGA/ 4CIF/2CIF/CIF/QCIF	Audio Output	Not support
		Audio Intput	Not support
Video Compression	H.265, H.264	Hardware Reset	Supports
Decoded Playback	Supports 4*5MP (X5S-4W)/ Supports 8*5MP(X5S-8W)	USB2.0 Interface	1

Specifications Model X5S-4W, X5S-8W

Dimensions(mm)

Product Dimensions	235 x 270 x 44.5 (mm)/ 9.25 x 10.6 x 1.75 (inch)
Packaging Dimensions	387 x 362 x 75 (mm)/ 15.2 x 14.3 3 (inch)

Weight

Net Weight

<=900g

Package Contents:

- Device

- Mouse

- Screw Kit (only available in the SKU without a hard disk)
- 1.5 Meters Power Adapter
- Quick Start Guide

Certificates

CE/FCC/UL/REACH/WEEE

Hereby declare: Wi-Fi Performance is affected by several factors. The functional performance of the described product may attenuate when there is INTERFERENCE caused by wireless routers, mobile cellular 4G base stations, radar, microwave ovens, and substation. Wireless performance will be negatively affected when there are physical obstacles, or the IP Camera is placed too far from the NVR to be linked.

Specifications are subject to change without notice. EZVIZ is a registered trademark of Hangzhou EZVIZ Network Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders.

https://www.ezvizlife.com/

Requirements

- Operating Conditions: 0°C - 40°C, humidity 90% or less