


PIN OUT

CN1 (568B)		CN2 (568B)	
WHITE-ORANGE	1	1	WHITE-ORANGE
ORANGE	2	2	ORANGE
WHITE-GREEN	3	3	WHITE-GREEN
GREEN	6	6	GREEN
BLUE	4	4	BLUE
WHITE-BLUE	5	5	WHITE-BLUE
WHITE-BROWN	7	7	WHITE-BROWN
BROWN	8	8	BROWN
SHELL			SHELL

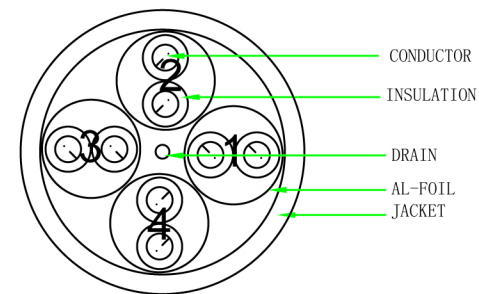

NOTE:

1. Fluke Channel Test ISO 11801 channel Class Ea
2. RoHS2.0 AND REACH compliant
3. Electrical test: 100% open short & miss wire test;
4. OPERATING TEMPERATURE: -10°C ~ 60°C

MATERIAL LIST

③	CABLE	CAT. 6A U/FTP (32AWG 7/0.08±0.008BC*1P+AL-FOIL)*4 +DRAIN 7/0.12AL-MG+ JACKET:LSZH(符合IEC 60332-1), OD:3.6±0.2mm	1	
②	Over mold	48P PVC (颜色同线材一致)	2	
①	Plug	RJ45 8P8C Shielded Plug带支架一排式, PIN GOLD PLATED 3u", The Shell Nickel plating, TRANSPARENT	2	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW		A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

CUSTOMER		ITEM NO.			
PRODUCT NAME		Cat. 6A U/FTP Patch cord Slim Type		UNIT	MM
DRAWNBY		CHECKBY		APPOBY	
ARVIN				DATE	