


PIN OUT

CN1 (568B)		CN2 (568B)	
WHITE-ORANGE	1	1	WHITE-ORANGE
ORANGE	2	2	ORANGE
WHITE-GREEN	3	3	WHITE-GREEN
GREEN	6	6	GREEN
BLUE	4	4	BLUE
WHITE-BLUE	5	5	WHITE-BLUE
WHITE-BROWN	7	7	WHITE-BROWN
BROWN	8	8	BROWN

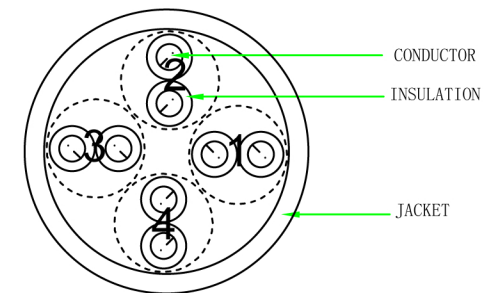

NOTE:

1. Fluke Channel Test ISO 11801 channel Class Ea
2. RoHS2.0 AND REACH compliant
3. Electrical test:100% open short & miss wire test;
4. OPERATING TEMPERATURE:-10°C ~ 60°C

MATERIAL LIST

③	CABLE	CAT. 6A U/UTP (32AWG 7/0.08±0.008BC*1P)*4+JACKET:PVC , OD:3.4±0.2mm	1	
②	Over mold	PVC/颜色同线材一致	2	
①	Plug	RJ45 8P8C Unshielded Plug, PIN GOLD PLATED Fu", TRANSPARENT	2	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
ARVIN				A1
		NEW		A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

CUSTOMER		ITEM NO.	
PRODUCT NAME	Cat.6A U/UTP Patch cord Slim Type	UNIT	MM
DRAWNBY	CHECKBY	APPOBY	DATE
ARVIN			