




# NTP001

v1.0




## HARDWARE


### FRONT VIEW

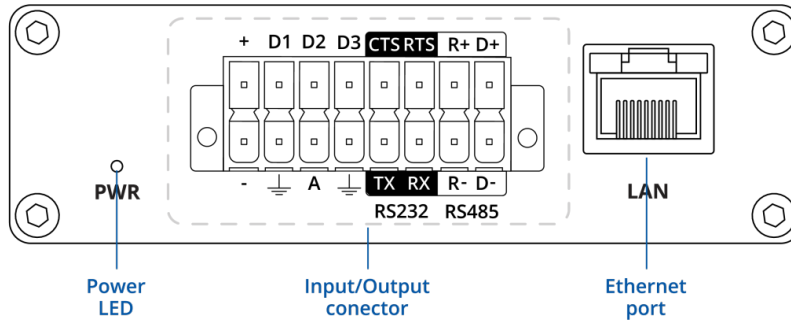

### BACK VIEW

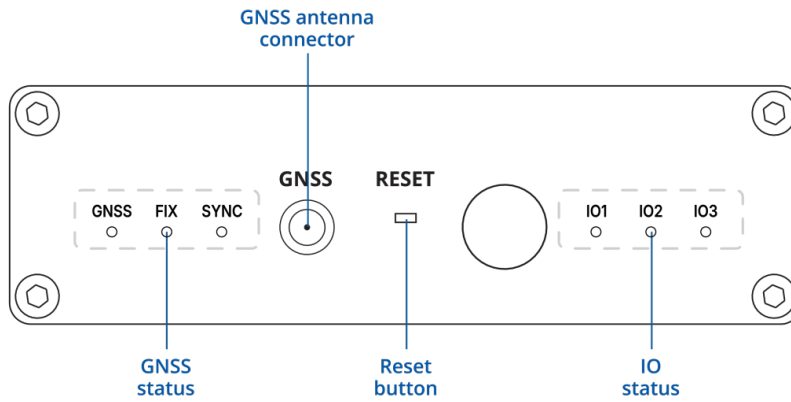

### 16-PIN TERMINAL BLOCK



## FEATURES

### Ethernet

<b>LAN</b>	1 x LAN port, 10/100 Mbps, compliance with IEEE 802.3, IEEE 802.3u, 802.3az standards, supports auto MDI/MDIX crossover
------------	---

### Network

<b>Network protocols</b>	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, SSL/TLS, ARP, SSH, DHCP, SNMP, MQTT
<b>Connection monitoring</b>	Ping Reboot, Wget Reboot, Periodic Reboot
<b>Network topology</b>	Visual representation of your network, showing which devices are connected to which other devices
<b>DDNS</b>	Supported >25 service providers, others can be configured manually

### Security

<b>Authentication</b>	Pre-shared key, digital certificates, X.509 certificates, TACACS+, Internal & External RADIUS users authentication, IP & login attempts block, time-based login blocking, built-in random password generator
<b>WEB filter</b>	Blacklist for blocking out unwanted websites, Whitelist for specifying allowed sites only
<b>Access control</b>	Flexible access control of SSH, Web interface, CLI and Telnet
<b>802.1x</b>	Port-based network access control client

### NTP

<b>Supported modes</b>	Server - Receive time from GPS and act as a NTP server to broadcast time for other devices (Stratum 1). Broadcast time through UDP or over Serial (RS232, RS485)
<b>Daytime Protocol</b>	TCP/UDP
<b>Date over Serial</b>	RS232/RS485
<b>NTP</b>	NTPv4, NTP authentication (MD5/SHA1), Unicast/Multicast/Broadcast mode
<b>Protocol</b>	NTP Stratum 1 Time Server (NTPv4)
<b>NTP Accuracy</b>	Ethernet NTP $\pm 1$ ms overall
<b>NTP Performance</b>	>300 NTP requests per second (wire speed)
<b>Synchronization Accuracy</b>	LAN synchronization typically 1–10ms

**MODBUS**


---

<b>Supported modes</b>	Server, Client
<b>Supported connection types</b>	RTU (RS232, RS485), TCP
<b>Custom registers</b>	MODBUS TCP custom register block requests, which read/write to a file inside the router, and can be used to extend MODBUS TCP Client functionality
<b>Supported data formats</b>	8-bit: INT, UINT; 16-bit: INT, UINT (MSB or LSB first); 32-bit: float, INT, UINT (ABCD (big-endian), DCBA (little-endian), CDAB, BADC), HEX, ASCII

**MQTT Gateway**


---

<b>Modbus MQTT Gateway</b>	Allows sending commands and receiving data from MODBUS Server through MQTT broker
----------------------------	---

**API**


---

<b>Teltonika Networks Web API (beta) support</b>	Expand your device's possibilities by using a set of configurable API endpoints to retrieve or change data. For more information, please refer to this documentation: <a href="https://developers.teltonika-networks.com">https://developers.teltonika-networks.com</a>
--	---

**Monitoring & Management**


---

<b>WEB UI</b>	HTTP/HTTPS, status, configuration, FW update, CLI, troubleshoot, multiple event log servers, firmware update availability notifications, event log, system log, kernel log, Internet status
<b>SSH</b>	SSH (v1, v2)
<b>SNMP</b>	SNMP (v1, v2, v3), SNMP Trap, Brute force protection
<b>JSON-RPC</b>	Management API over HTTP/HTTPS
<b>MODBUS</b>	MODBUS TCP status/control

**System Characteristics**


---

<b>CPU</b>	Mediatek, 580 MHz, MIPS 24KEc
<b>RAM</b>	128 MB, DDR2
<b>FLASH storage</b>	16 MB, NOR Flash

**Firmware / Configuration**


---

<b>WEB UI</b>	Update FW from file, check FW on server, configuration profiles, configuration backup
<b>Keep settings</b>	Update FW without losing current configuration
<b>Factory settings reset</b>	A full factory reset restores all system settings, including the IP address, PIN, and user data to the default manufacturer's configuration

**FIRMWARE CUSTOMISATION**

<b>Operating system</b>	RutOS (OpenWrt based Linux OS)
<b>Supported languages</b>	Busybox shell (ash), Lua 5.1, C, C++
<b>Development tools</b>	SDK package with build environment provided
<b>GPL customization</b>	You can create your own custom, branded firmware and web page application by changing colours, logos, and other elements in our firmware to fit your or your clients' needs

**Location Tracking**

<b>GNSS</b>	GPS, GLONASS, BeiDou, Galileo and QZSS
<b>Acquisition Sensitivity</b>	Acquisition Sensitivity -146 dBm, Reacquisition Sensitivity -157 dBm, Tracking Sensitivity -157 dBm
<b>Accuracy</b>	CEP-50 open sky 2.5 m
<b>Time Source</b>	GPS 1575.42 ±1.023 MHz, GLONASS 1597.5–1605.8 MHz, Galileo 1575.42 ±2.046 MHz, BDS 1561.098 ±2.046 MHz
<b>Startup</b>	Cold GPS acquisition in 120 seconds

**Serial**

<b>RS232</b>	Terminal block connector: TX, RX, RTS, CTS
<b>RS485</b>	Terminal block connector: D+, D-, R+, R- (2 or 4 wire interface)

**Input / Output**

<b>Input</b>	3 x Digital Input, 0 - 6 V detected as logic low, 8 - 30 V detected as logic high
<b>Output</b>	3 x Digital Output, Open collector output, max output 30 V, 300 mA

**Power**

<b>Connector</b>	2-pin in 16-pin industrial terminal block
<b>Input voltage range</b>	9 - 30 VDC, Overvoltage protection, Reverse polarity protection, Surge protection +/- 1kV 50 uS Max
<b>Power consumption</b>	Idle: 2 W, Max: 3.5 W

### Physical Interfaces

---

<b>Ethernet</b>	1 x RJ45 ports, 10/100 Mbps
<b>I/O's</b>	3 x Configurable I/O, 1 x Analog input in 16-pin terminal block
<b>Status LEDs</b>	1 x Power, 2x GNSS status LEDs, 1x NTP Server status LED, 3 x IO status LEDs
<b>Power</b>	1 x 16-pin terminal block
<b>Antennas</b>	1 x SMA for GNSS
<b>RS232</b>	4-pin in 16-pin terminal block (TX, RX, RTS, CTS)
<b>RS485</b>	4-pin in 16-pin terminal block (D+, D-, R+, R-)
<b>Reset</b>	Reboot/User default reset/Factory reset button

### Physical Specification

---

<b>Casing material</b>	Anodized aluminum housing and panels
<b>Dimensions (W x H x D)</b>	82.6 x 25 x 83 mm
<b>Weight</b>	180 g
<b>Mounting options</b>	DIN rail, wall mount, flat surface (all require additional kit)

### Operating Environment

---

<b>Operating temperature</b>	-40 °C to 75 °C
<b>Operating humidity</b>	10% to 90% non-condensing
<b>Ingress Protection Rating</b>	IP30


### Regulatory & Type Approvals

---

<b>Regulatory</b>	CE, UKCA, CB, UCRF, EAC, WEEE
-------------------	-------------------------------

## ORDERING

### STANDARD PACKAGE\*

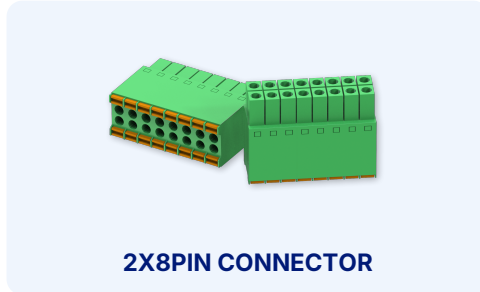

- NTP001 GNSS NTP Time Server
- [16-pin terminal block](#)
- QSG (Quick Start Guide)
- Packaging box

\*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please [contact us](#) directly.

### CLASSIFICATION CODES

**HS Code:** 851762

**HTS:** 8517.62.00


### AVAILABLE VERSIONS

NTP001 0*****	N/A	NTP001000000 / Standard package
---------------	-----	---------------------------------

## NTP001 SPATIAL MEASUREMENTS


**TOP VIEW**

The figure below depicts the measurements of device and its components as seen from the top:

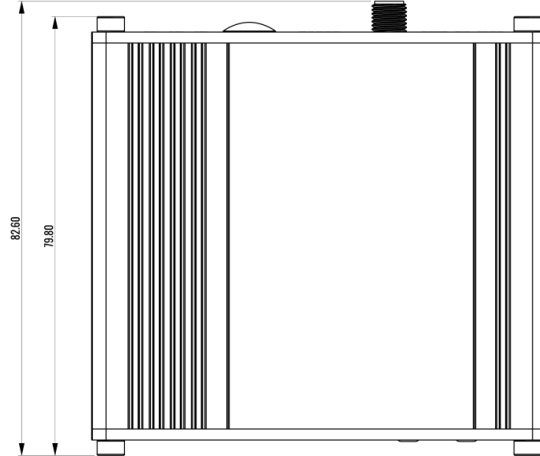


**RIGHT VIEW**

The figure below depicts the measurements of device and its components as seen from the right:

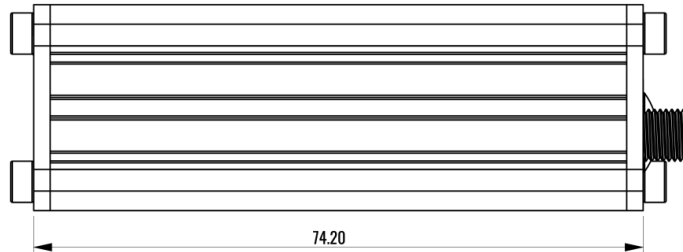

**REAR VIEW**


The figure below depicts the measurements of device and its components as seen from the back panel side:

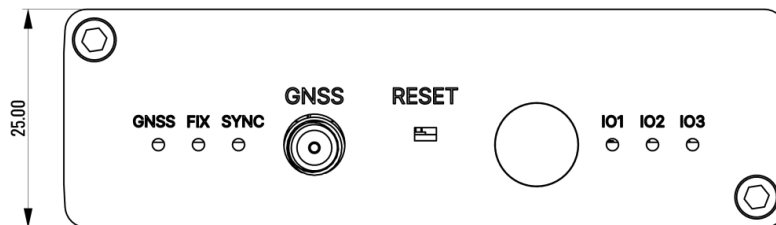



**FRONT VIEW**

The figure below depicts the measurements of device and its components as seen from the front panel side:

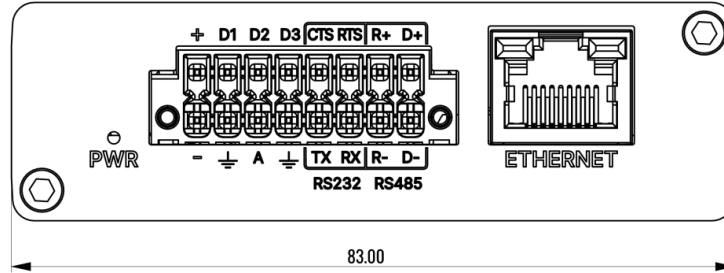

**MOUNTING SPACE REQUIREMENTS**

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

