

DS-KH1200 Video Intercom Two-Wire Analog Indoor Station





The Hikvision 2-wire indoor station, with simple design and 7-inch touch screen, brings you a fluent video, audio communication, and quick door opening permission.

- 2-wire plug & play analog indoor station
- 7-inch TFT screen with 1024 × 600 resolution
- Receive video call and unlock via indoor station



Specification


| System parameters | | | | |
|--------------------------------|---|--|--|--|
| Operation system | Embedded Analog operation system | | | |
| ROM | / | | | |
| RAM | / | | | |
| Processor | / | | | |
| Display parameters | | | | |
| Screen size | 7-inch | | | |
| Operation method | Non-touch | | | |
| Туре | TFT | | | |
| Resolution | 1024 × 600 | | | |
| Video parameters | | | | |
| Lens | / | | | |
| Resolution | 1 | | | |
| FOV | / | | | |
| Wide dynamic range (WDR) | / | | | |
| Video compression standard | / | | | |
| Focal length | 1 | | | |
| Audio parameters | | | | |
| Audio input | Built-in omnidirectional microphone | | | |
| Audio compression standard | | | | |
| Audio output | Built-in loudspeaker (more than 80 dB within 20 cm) | | | |
| Audio compression bitrate | 1 | | | |
| Audio quality | / | | | |
| Volume adjustment | Adjustable with touch buttons | | | |
| Capacity | | | | |
| Notice capacity | / | | | |
| Linked network camera capacity | 1 | | | |
| Linked indoor extensions | 2 | | | |
| capacity | 2 | | | |
| Linked doorphone capacity | 2 | | | |
| Network parameters | | | | |
| Network protocol | 1 | | | |
| Wi-Fi | / | | | |
| Bluetooth | 1 | | | |
| 3G/4G | 1 | | | |
| Zigbee | / | | | |
| Device interfaces | | | | |
| Alarm input | 1 | | | |
| Network interface | 1 | | | |
| TAMPER | 1 | | | |
| RS-485 | / | | | |
| USB | 1 | | | |
| TF card | / | | | |
| Alarm output | / | | | |



| DIP switch | 2, ring duration can be set via DIP switch | | |
|-------------------------|---|--|--|
| General | | | |
| Button | 6 touch buttons | | |
| Installation | Surface mounting | | |
| Indicator | / | | |
| Weight | Net weight: 334.6 g | | |
| | Gross weight: 874.4 g | | |
| Protective level | 1 | | |
| Working temperature | -10 °C to 50 °C (14 °F to 122 °F) | | |
| Working humidity | 10% to 90% | | |
| Dimension (W × H × D) | 187 mm × 137 mm × 25.4 mm (7.36" × 5.39" × 1.00") | | |
| Battery | / | | |
| Power supply | 1 | | |
| Application environment | Indoor | | |
| Power consumption | ≤ 5 W | | |

Physical Interface

| No. | Description | No. | Description |
|-----|-----------------|-----|----------------|
| 1 | Screen | 8 | Monitor/Switch |
| 2 | Microphone | 9 | Terminals |
| 3 | Volume + | 10 | Loudspeaker |
| 4 | Volume - | 11 | Power Terminal |
| 5 | Receive/Decline | 12 | DIP Switch |
| 6 | Unlock Door 2 | 13 | Debugging Port |
| 7 | Unlock Door 1 | | |

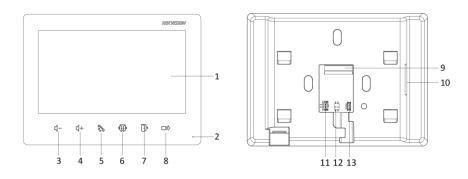



Available Model

DS-KH1200



Dimension





Unit:mm

Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ





