


- NOTE:**
1. Fluke Channel Test ISO 11801 channel Class Ea
 2. RoHS 2.0 AND REACH compliant
 3. Electrical test: 100% open short & miss wire test
 4. OPERATING TEMPERATURE: $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$

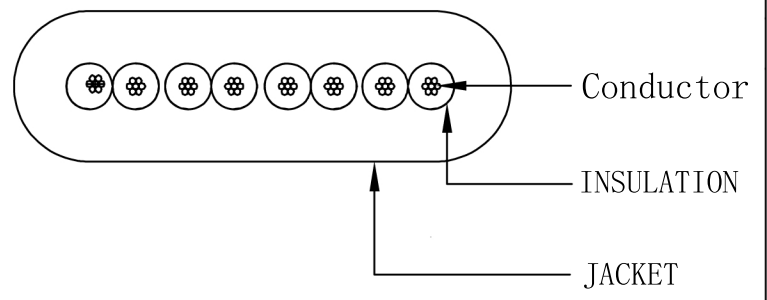

MATERIAL LIST

③	Over mold	PVC	2	
②	Plug	RJ45 8P8C Unshielded short Plug, PIN GOLD PLATED Fu”	2	
①	Cable	U/UTP CAT. 6 32AWG (7/0.08 ± 0.008BC*1P) *4PAIRS, Jacket: PVC OD: T=1.45 ± 0.2mm W=6.0 ± 0.2mm	1	

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW		A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

CUSTOMER		ITEM NO.	SEE THE CHART
PRODUCT NAME	CAT. 6 U/UTP FLAT PATCH CORD		UNIT MM
DRAWN BY	CHECK BY	APPO BY	DATE
ARVIN			