




# Unmanaged Switch | Datasheet

## TL-SF1008LP V3


8-Port 10/100Mbps Desktop Switch with 4-Port PoE+

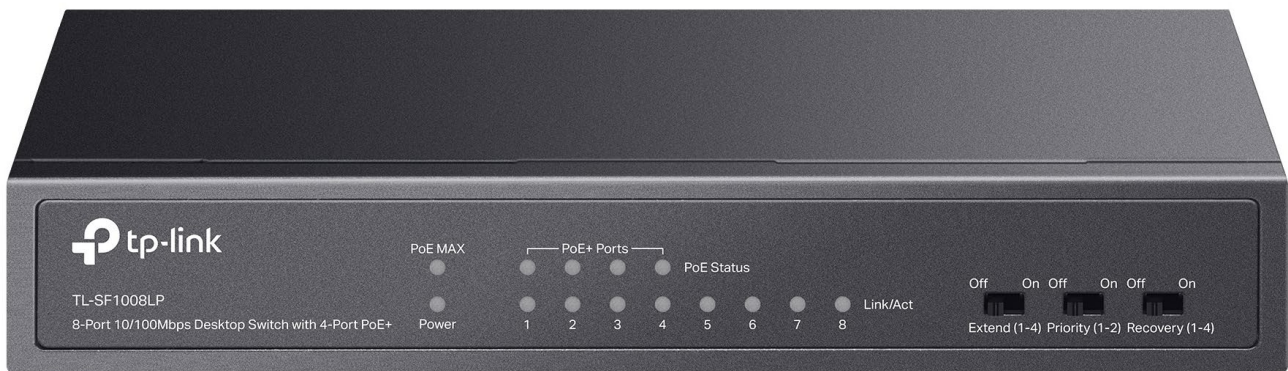

### Highlights

- 4× 10/100 Mbps PoE+ ports with up to 30 W PoE output per port\*
- 41 W total PoE budget\*
- Up to 250m data and power transmitting range under Extend Mode\*\*
- Priority Mode ensures high priority of ports 1–2 to guarantee the quality of sensitive application.
- Automatically reboots your dropped or unresponsive PoE-powered devices.
- Simply plug and play for instant connectivity with no configuration required.
- Fanless design reduces power consumption and ensures silent operation, ideal for noise-sensitive homes or businesses.
- Desktop / Wall-mounting

# Product Pictures



# Specifications

Model	TL-SF1008LP V3
Standards	IEEE 802.3, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at
Interface	<ul style="list-style-type: none"> <li>• 8*10/100 Mbps RJ45 Ports with 4 PoE+ Ports (Port 1 to Port 4)</li> <li>• AUTO Negotiation/AUTO MDI/MDIX</li> </ul>
Network Media (Cable)	<ul style="list-style-type: none"> <li>• 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)</li> <li>• 100BASE-TX: UTP category 5 or above cable (maximum 100m)</li> </ul>
Max Power Consumption	46.56 W
Max Heat Dissipation	158.30 BTU/h
PoE Ports (RJ45)	PoE Standard: 802.3 af/at compliant PoE Ports: Port 1- Port 4 PoE Power Budget: 41 W
Transmission Method	Store-And-Forward
Packet Forwarding Rate	1.19 Mbps
Switch Capacity	1.6 Gbps
MAC Address Table	2K
Packet Buffer Capacity	768 Kbit
Jumbo Frame	2 KB

Model	TL-SF1008LP V3
Extend Mode	For Ports 1-4
Priority Mode	For Ports 1-2
PoE Auto Recovery	For Ports 1-4
Fan Quantity	Fanless
External Power Supply	External Power Adapter (Output: 53.5 VDC / 0.81 A)
Dimensions ( W x D x H )	6.7 × 3.9 × 1.1 in (171 × 98 × 27 mm)
Certification	FCC, CE, RoHS
Package Contents	Switch, Power Adapter, Installation Guide
Operating Temperature	0°C to 40 °C (32 °F to 104°F )
Storage Temperature	-40 °C to 70 °C (-40 °F to 158°F)
Operating Humidity	10% to 90% non-condensing
Storage Humidity	5% to 90% non-condensing

#### Disclaimers

\*PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.

\*\*The speed of the ports in extend mode will downgrade to 10 Mbps. The actual transmission distance may vary due to power consumption of PoE-powered devices or the cable quality and type.

[www.tp-link.com](http://www.tp-link.com)

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2024 TP-Link