


5G COMBO MOBILE SMA ANTENNA

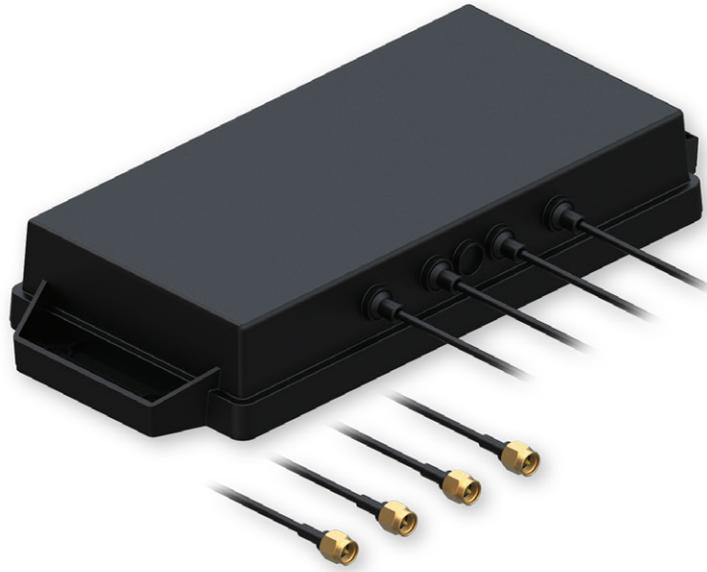

Technical data

Mounting type	M6 Screw or Adhesive
Enclosure material	PC/PC+ABS
UV resistant	✓
Cable length	3000 mm
Weight	400 g
Operating temperature	-40 °C ~ +80 °C
Operating humidity	≤ 90 %
Ingress protection rating	IP67
RoHS compliant	✓

5G mobile MIMO antenna


Frequency range	600 ~ 960, 1427 ~ 2700, 3300 ~ 4200, 4400 ~ 5000 MHz
Polarisation	Linear
Radiation pattern type	Omni-directional
Gain	≤ 4 dBi
V.S.W.R	≤ 2.5
Impedance	50 Ω

Connector type and count	4 x SMA Male
Cable type	4 x LMR100


Radiation patterns

Mobile - 1 Antenna

ELEVATION

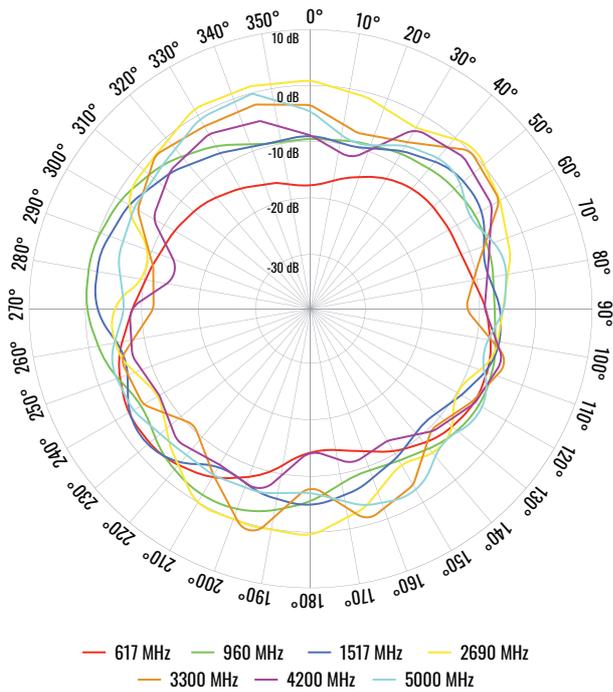


AZIMUTH

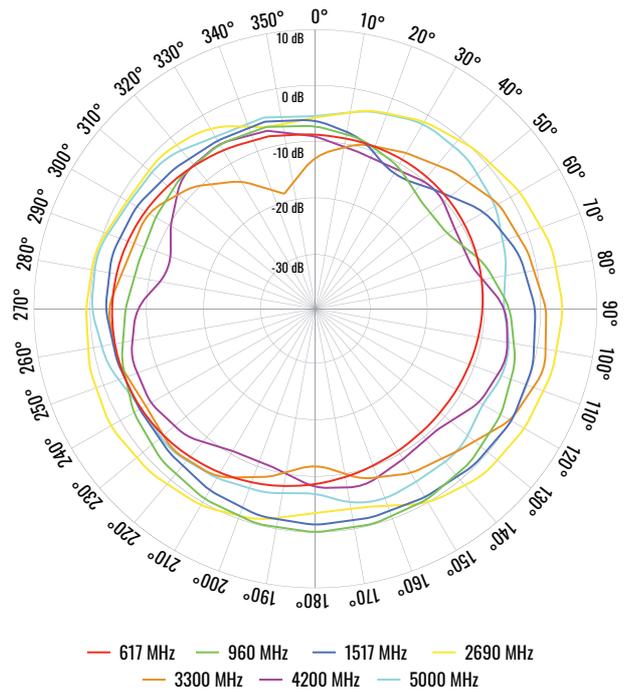


Mobile - 2 Antenna

ELEVATION

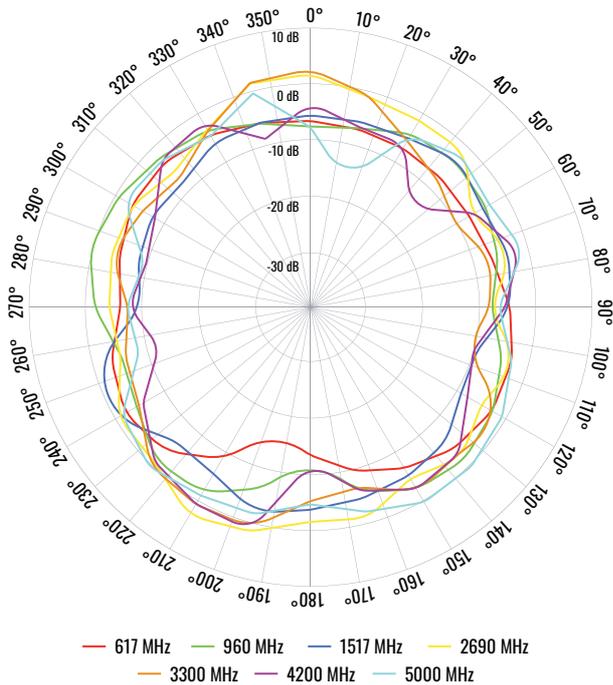


AZIMUTH

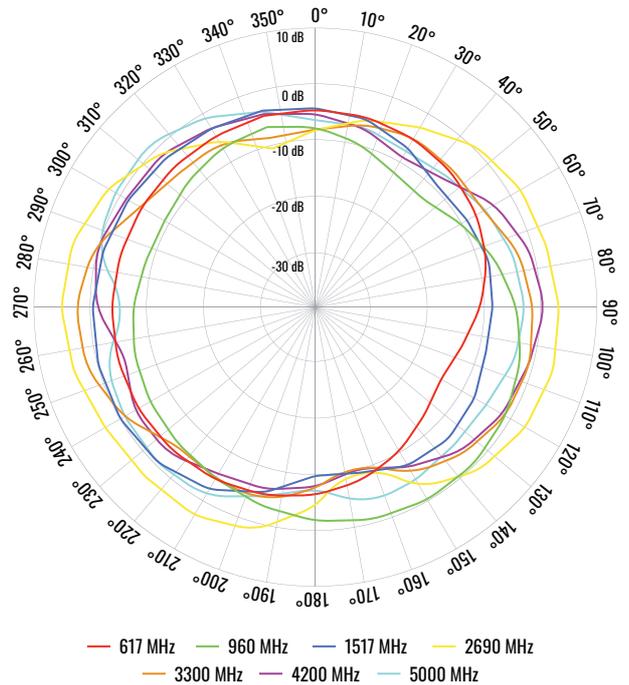


Radiation patterns

Mobile - 3 Antenna

ELEVATION

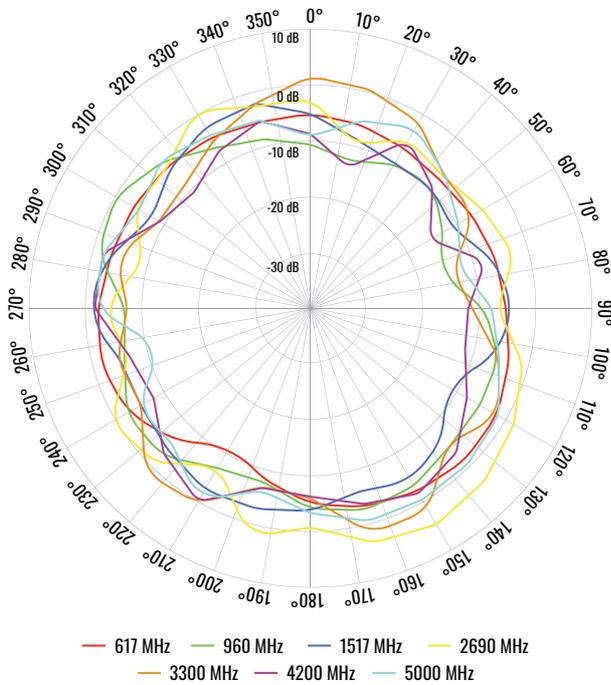


AZIMUTH

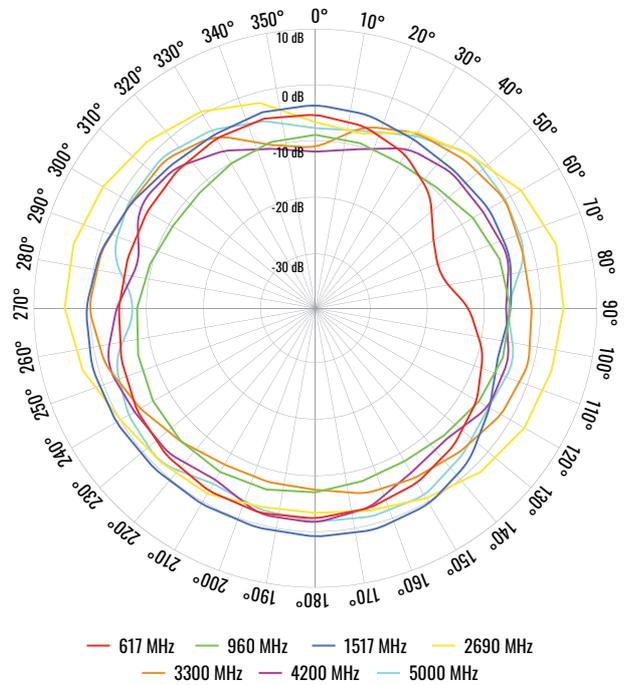


Mobile - 4 Antenna

ELEVATION

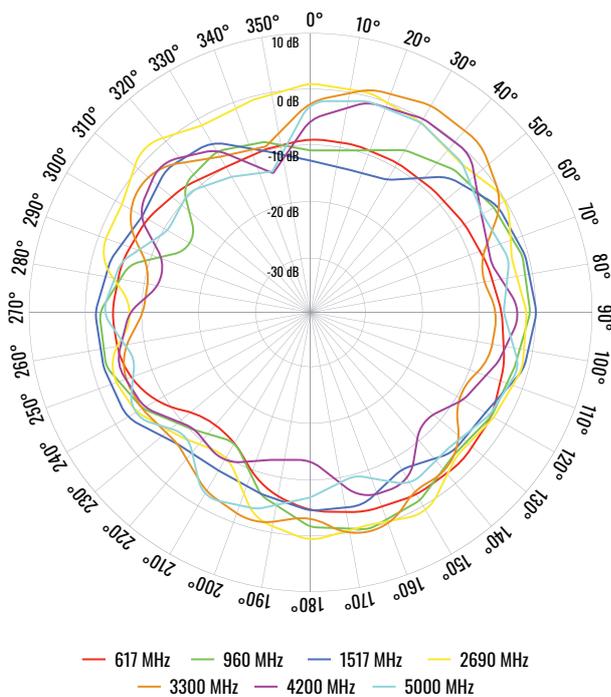

AZIMUTH

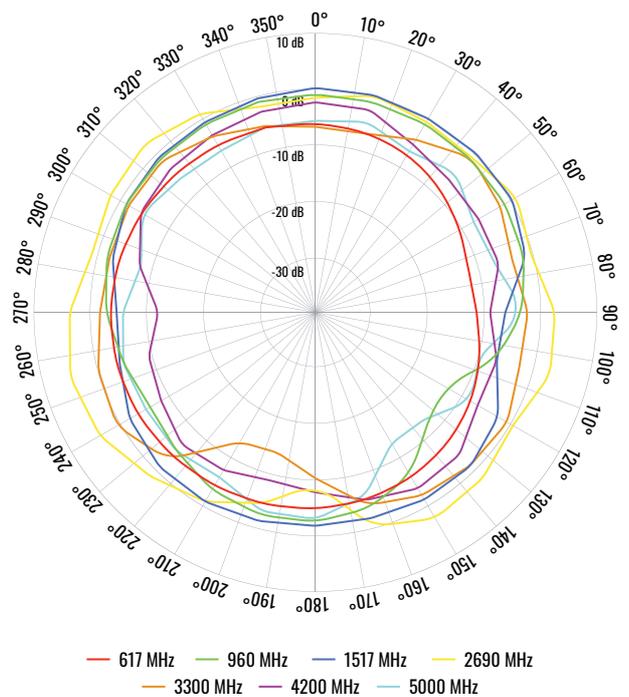

Spatial measurements

