


# UTP Category 5E Cables (0.45mm)

CAB-LC2100A-E2-ECA-IN

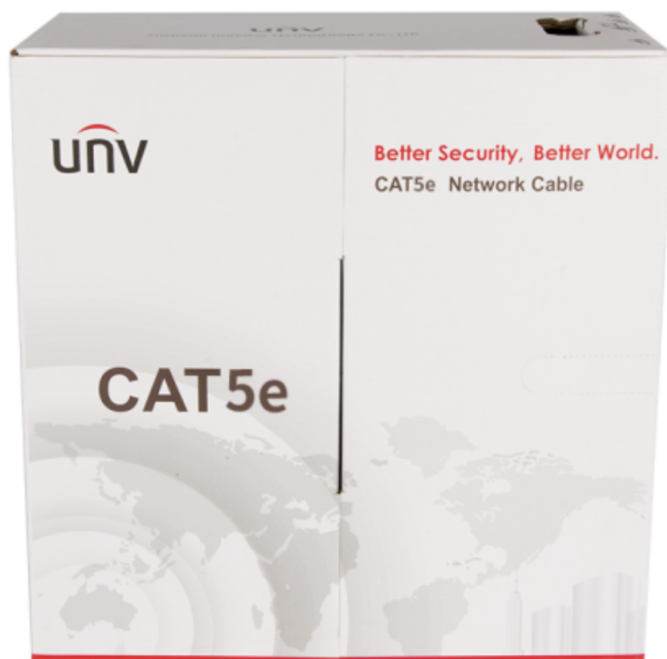

## Specifications

|                       |                       |
|-----------------------|-----------------------|
| Model                 | CAB-LC2100A-E2-ECA-IN |
| Cable                 |                       |
| Product model         | CAB-LC2100A-E2-ECA-IN |
| Product specification | HSYV-5e 4×2×0.45      |
| Test Standard         | Fluke Test 90m        |
| Packing length        | 305±1 m               |
| Rip-cord              | Yes                   |
| Ambient temperature   | -20°C~75°C            |
| Conductor             |                       |
| Material              | Solid-Bare Copper     |
| AWG                   | 25                    |
| Nom.O.D.(mm)          | 0.45±0.01 mm          |
| DC resistance         | ≤113 Ω/km             |
| Insulation            |                       |
| Material              | HDPE                  |

|                         |                                                                          |
|-------------------------|--------------------------------------------------------------------------|
| Diameter                | 0.82±0.05 mm                                                             |
| Color                   | Blue/White- Blue,Green/White-Green,Orange/White-Orange,Brown/White-Brown |
| <b>Sheath</b>           |                                                                          |
| Material                | PVC                                                                      |
| External O.D.           | 4.7±0.3 mm                                                               |
| Thickness               | 0.5±0.1 mm                                                               |
| Tensile strength        | >13.8 Mpa                                                                |
| Color                   | Gray                                                                     |
| <b>Surface Printing</b> |                                                                          |
| Color                   | Black                                                                    |
| Letter height           | 3.0±0.3 mm                                                               |
| Print error / Space     | 1±0.005 m                                                                |
| <b>Packing</b>          |                                                                          |
| Packing                 | Pallet                                                                   |
| Once packing dimension  | 340mm*220mm*340mm                                                        |

## Ordering Info

| Product Model         | Description             |
|-----------------------|-------------------------|
| CAB-LC2100A-E2-ECA-IN | Cat5e(UTP),305m,BC,Gray |

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.