


Appearance

The USB Type-C IdeaShare Key (IdeaShare Key for short) works with endpoints to perform wireless projection, enabling content sharing between endpoints and computer/mobile devices. The following uses a computer as an example.

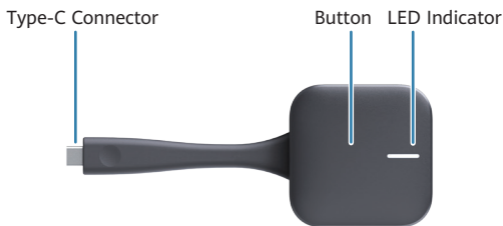

- **Type-C Connector**
Used to connect IdeaShare Key to an endpoint or computer.
- **Button**
Used to start or stop video/audio sharing from a computer to an endpoint.
- **LED Indicator**

Indicator	IdeaShare Key Status
Off	Not in the working state.
Blinking white (once per second)	<ul style="list-style-type: none">• Inserted in an endpoint and is pairing or upgrading.• Inserted in a computer and is connecting to an endpoint.
Steady white	<ul style="list-style-type: none">• Inserted in an endpoint and is paired or upgraded.• Inserted in a computer and connected to an endpoint.• Screen sharing is stopped.

Indicator	IdeaShare Key Status
Blinking red (once per second)	<ul style="list-style-type: none">• Inserted in an endpoint but fails to be paired or upgraded.• Inserted in a computer but fails to be connected to the endpoint.
Steady Red	Faulty.
Steady blue	The screen is being shared.

Operation

Assume that the Type-C port of the computer supports audio and video transmission. After pairing the IdeaShare Key with the endpoint, you can connect it to the computer and press it to start projection when the indicator is steady white.

1 Pairing

Insert IdeaShare Key in an endpoint. Wait until a message is displayed indicating that IdeaShare Key is successfully paired on the endpoint's user interface.

2 Projection

Insert the IdeaShare Key into the Type-C port of the computer. After the connection is successful, the IdeaShare Key indicator is steady white.

Press the IdeaShare Key to share the computer screen and audio with the endpoint. Press it again to stop sharing.

Note: If your computer does not have a Type-C port, use a USB port converter to connect the IdeaShare Key to the computer.

3 (Optional) Installation

If the Type-C port on your computer does not support audio and video transmission, you need to install the IdeaShare Key software on your computer. After the connection is successful, you can press the button to start projection.

Windows: On the home displayed after you click **My PC** or **This PC**, double-click the drive or double-click **IdeaShare Key.exe** in the drive path to manually complete the installation.

macOS: Double-click **IdeaShareKeySetup** in the **IdeaShareKey** drive path on the desktop to manually complete the installation and authorization.

The installation file path varies depending to the operating system version. For example, if the operating system is Windows 10 Professional, the installation file path is **This PC > IdeaShare Key > IdeaShare Key.exe**.

Specifications

Item	Specification
Power supply	5 V DC
Maximum power consumption	2.5 W
Ambient temperature	<ul style="list-style-type: none">• Operating state: 0°C to 40°C (32°F to 104°F)• Non-operating state: -40°C to +70°C (-40°F to +158°F)
Relative humidity (non-condensing)	<ul style="list-style-type: none">• Operating state: 5% to 95%• Non-operating state: 0% to 95%
Package dimensions (H x W x D)	175 mm × 100 mm × 33.5 mm
Product dimensions (H x W x D)	154 mm × 60 mm × 18 mm
Gross weight	195 g
Net weight	76 g
Working distance	≤ 20 m
Wi-Fi frequency	2.4 GHz and 5 GHz
Wi-Fi operating frequency bands	<ul style="list-style-type: none">• 2400 MHz to 2483.5 MHz• 5150 MHz to 5250 MHz• 5725 MHz to 5850 MHz

Item	Specification
Maximum Wi-Fi power	<ul style="list-style-type: none"> • 2.4G: 11.93 dBm • 5.2G: 7 dBm • 5.7G: 9 dBm
Projection resolutions	<ul style="list-style-type: none"> • Without driver software: up to 1080p 60 fps • Driver software installed: up to 4K 30 fps
OS	<ul style="list-style-type: none"> • Computer: <ul style="list-style-type: none"> ◦ Without driver software: <ul style="list-style-type: none"> ▪ Windows 10 or 11 ▪ macOS 10.15.3 or later ◦ Driver software installed: <ul style="list-style-type: none"> ▪ 32-bit or 64-bit Windows 7, 8, 8.1, 10, 11 ▪ macOS 10.13.6 or later • Mobile device: <ul style="list-style-type: none"> ▪ HarmonyOS 2.0 or later ▪ Android 10.0 or later ▪ iOS 12.1 or later

Note:

1. When an IdeaShare Key is used with a mobile device, the mobile device must support audio and video output. The support capability varies depending on the device vendor.
2. In an environment without signal interference, the maximum working distance is 20 m.
3. The preceding specifications are obtained from lab tests. The actual specifications may vary depending on the environment and devices.

Statement on a Class A Product

Warning: Operation of this equipment in a residential environment could cause radio interference.

Angaben zu einem Produkt der Klasse A

Warnhinweis: Der Betrieb dieses Geräts bzw. dieser Einrichtung kann im Wohnbereich Funkstörungen verursachen.

Hereby, Hikeen Technology Co., Ltd. declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:
<http://www.hikeen.com.cn>


Manufacturer@Shenzhen Hikeen Technology Co., Ltd.
8th Floor, South, Building A, Tefa Infoport Building, Kefeng Road
Science Park Community, Yuehai Street, Nanshan District
Shenzhen 518057

People's Republic of China

Powered by HUAWEI IdeaShare (Type-C)

Disposal and Recycling Information



This symbol on the device and any included batteries indicates that they should not be disposed of as normal household garbage. Do not dispose of your device or  batteries as unsorted municipal waste. They should be handed over to a certified collection point for recycling or proper disposal when they can no longer be used.

For more detailed information about the recycling of the device or batteries, contact your local city office, the household waste disposal service, or the retail store where you purchased this device.

The disposal of this device is subject to the Waste from Electrical and Electronic Equipment (WEEE) Directive of the European Union. The purpose for separating WEEE and batteries from other waste is to minimize any environmental impact and health hazards due to the presence of hazardous substances.

Reduction of Hazardous Substances

This device is compliant with the EU Registration, Evaluation, Authorization and Restriction of Chemicals (REACH) Regulation (Regulation No 1907/2006/EC of the European Parliament and of the Council) and the EU Restriction of Hazardous Substances (RoHS) Directive (Directive 2011/65/EU of the European Parliament and of the Council).

Warranty Card

Thank you for choosing **our products**. Please read this warranty card carefully and fill in the required information. Keep the card in a safe place. If lost it cannot be replaced.

Registry

Your Name (or Company Name): _____

Contact		Invoice Number	
Address		Expiration Date	
Telephone		Dealer's Name	
Product Model		Dealer's Address	
Serial Number		Dealer's Telephone	

Dealer's Seal: _____

Limited Warranty

We warrant the products that are purchased from authorized dealers to be free from defects in materials and workmanship, under proper use and in normal conditions, during the expressed warranty period.

Special Notice

1. The terms of warranty expressed in the purchase contract enjoy higher validity than the terms expressed within this card. This card is intended to be used solely as a warranty certificate.
2. The warranty card must be preserved in good condition and free of any scratch or alterations.
3. The warranty card must be presented to the authorized service technician when the product is being returned for repairs.

This warranty card does not cover defects caused by:

1. Modifications and alterations performed on the warranted product by parties other than authorized dealers.
2. Damage caused by using the product under inadequate operating environments.
3. Force majeure including but not limited to fires, earthquakes, lightning storms, and tsunamis.
4. Operations performed on the product unexpressed within User Guide.
5. Normal wear and tear of components, including but not limited to the shell and the power module.
6. The warranty card is altered or rendered illegible, or the product serial number recorded on the warranty card is inconsistent with the serial number imprinted or labeled on the product.

For cases not included within this limited warranty, not applicable, or where the warranty is rendered void or expired, we reserve the right to charge for the repair services should the said products be capable of being repaired.

We reserve the right to interpret this limited warranty.

Contact Information

Shenzhen Hikeen Technology Co., Ltd.
8th Floor, South, Building A, Tefa Infoport Building, Kefeng Road
Science Park Community, Yuehai Street, Nanshan District
Shenzhen 518057
People's Republic of China