

# Video Doorbell

URDB1



## Key Features



Crystal-Clear 1080P HD Video




Wi-Fi Connection



Noise-Free Two-Way talk



Adjustable Motion Detection

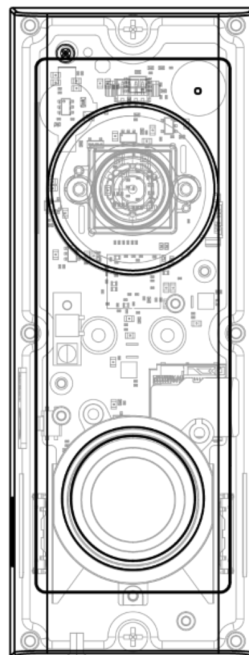

Instantaneous Alert and Answer



Infrared Night Vision



IP65 Weather-Resistant






Security System Compatible



## Specifications

<b>Camera</b>	Sensor	2.0 megapixel, progressive scan, CMOS
	Lens	2.0mm@F2.0
	Angle of View (H)	160°
	Angle of View (V)	83°
	Minimum Illumination	Colour: 0.02Lux (F2.0, AGC ON) 0Lux with IR on
	Day/Night	IR-cut filter with auto switch (ICR)
	IR Range	Up to 5m (16ft) IR range
	WDR	DWDR
<b>Video</b>	Video Compression	H.265, H.264
	H.264 code profile	Baseline Profile, Main Profile
	Frame Rate	Main Stream: 1080P (1920*1080), Max 25fps; Sub Stream: D1 (720*576), Max 25fps
	Motion Detection	Supported
<b>Storage</b>	Edge Storage	Micro SD, up to 128GB
<b>Wi-Fi</b>	Wireless Standards	IEEE 802.11b/g/n
	Frequency Range	2.4GHz ~ 2.4835GHz
<b>Interface</b>	Built-in Mic	Supported
	Built-in Speaker	Supported
	Audio Compression	G.711
	Sampling Rate	8kHz
	Indicator light	Supported
<b>General</b>	Power	AC 16-24V and DC 12V Power consumption: Max 5.5W
	Dimensions (L × W × H)	46.8 × 23.5 × 123.2mm (1.8" × 0.9" × 4.9")
	Weight	0.11kg (0.24lb)
	Working Environment	-30°C ~ 50°C (-22°F ~ 122°F), Humidity: ≤95% RH(non-condensing)
	Ingress Protection	IP65
	Reset Button	Supported
	Call Button	Supported

## Dimensions

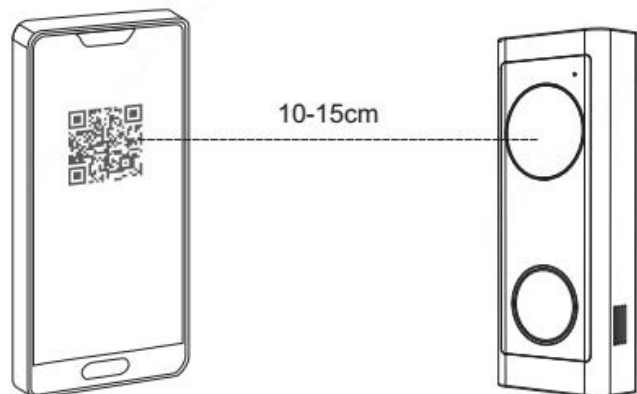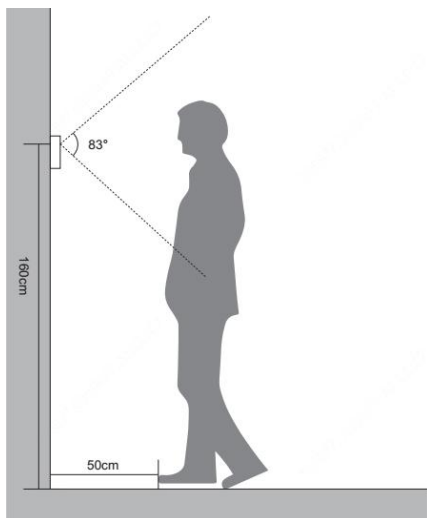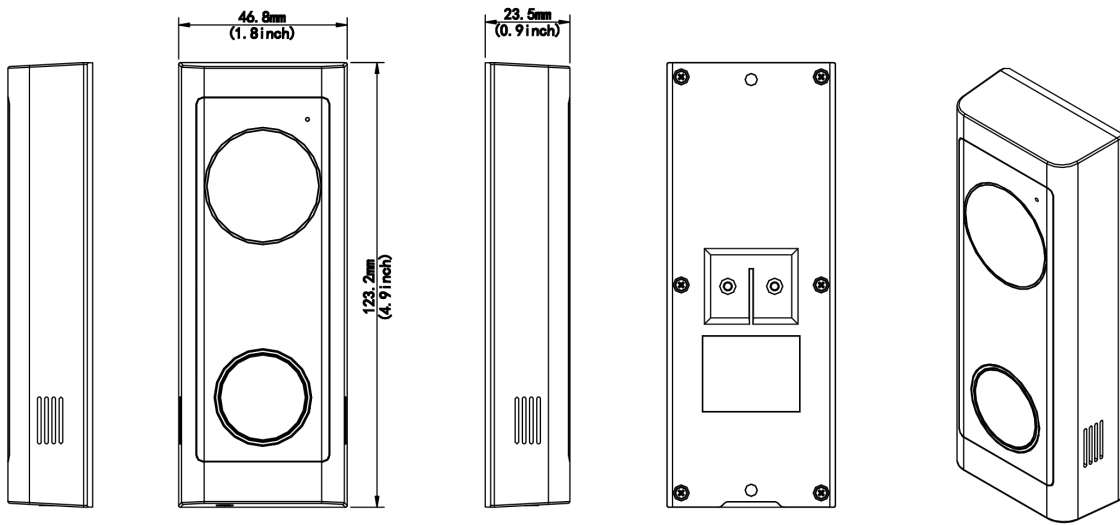

**Zhejiang Uniview Technologies Co., Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.